UC Berkeley EECS
Lecturer
Michael Ball

Computational Structures in Data Science

Recursion II

Announcements

Learning Objectives

- Write a recursive function
- Understand the base case and a recursive case
- Apply Recursive Functions to lists

The Recursive Process

- Recursive solutions involve two major parts:
  - Base case(s), the problem is simple enough to be solved directly
  - Recursive case(s). A recursive case has three components:
    - Divide the problem into one or more simpler or smaller parts
    - Invoke the function (recursively) on each part, and
    - Combine the solutions of the parts into a solution for the problem.

Recursion With Lists

```
def first(s):
    """Return the first element in a sequence."""
    return s[0]
def rest(s):
    """Return all elements in a sequence after the first"""
    return s[1:]

def min_r(s):
    """Return minimum value in a sequence."""
    if
    else:
```

Base Case

Recursive Case

- Recursion over sequence length, rather than number magnitude

Iteration vs Recursion: Sum Numbers

For loop:

```
def sum(n):
    s=0
    for i in range(0,n+1):
        s=s+i
    return s
```

Iteration vs Recursion: Sum Numbers

While loop:

```
def sum(n):
    s=0
    i=0
    while i<n:
        i=i+1
        s=s+i
    return s
```

Iteration vs Recursion: Sum Numbers

Recursion:

```
def sum(n):
    if n == 0:
        return 0
    return n+sum(n-1)
```

Iteration vs Recursion: Cheating!

Sometimes it's best to just use a formula! But that's not always the point. ☺

```
def sum(n):
    return (n * (n + 1)) / 2
```

In words

- The sum of no numbers is zero
- The sum of 1^2 through n^2 is the
  - sum of 1^2 through $(n-1)^2$
  - plus n^2

```
def sum_of_squares(n):
    if n < 1:
        return 0
    else:
        return sum_of_squares(n-1) + n**2
```

Recall: Iteration

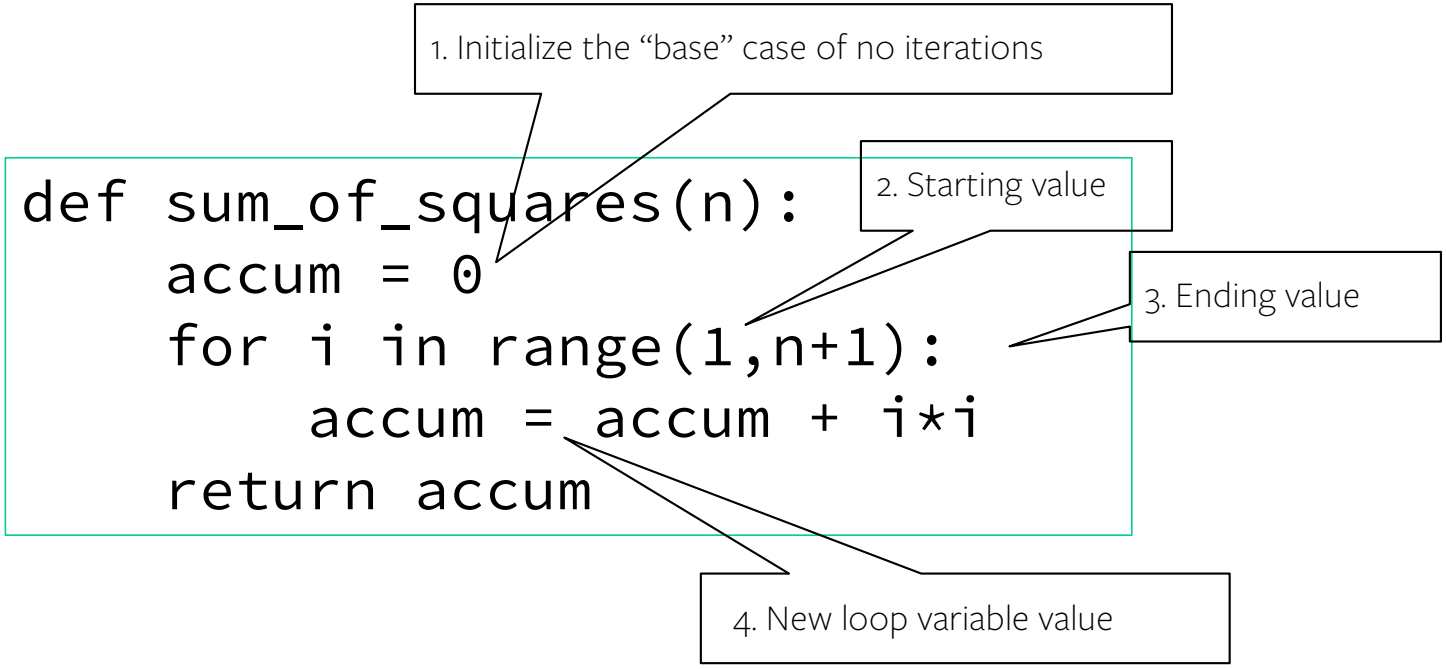

Recursion Key concepts – by example

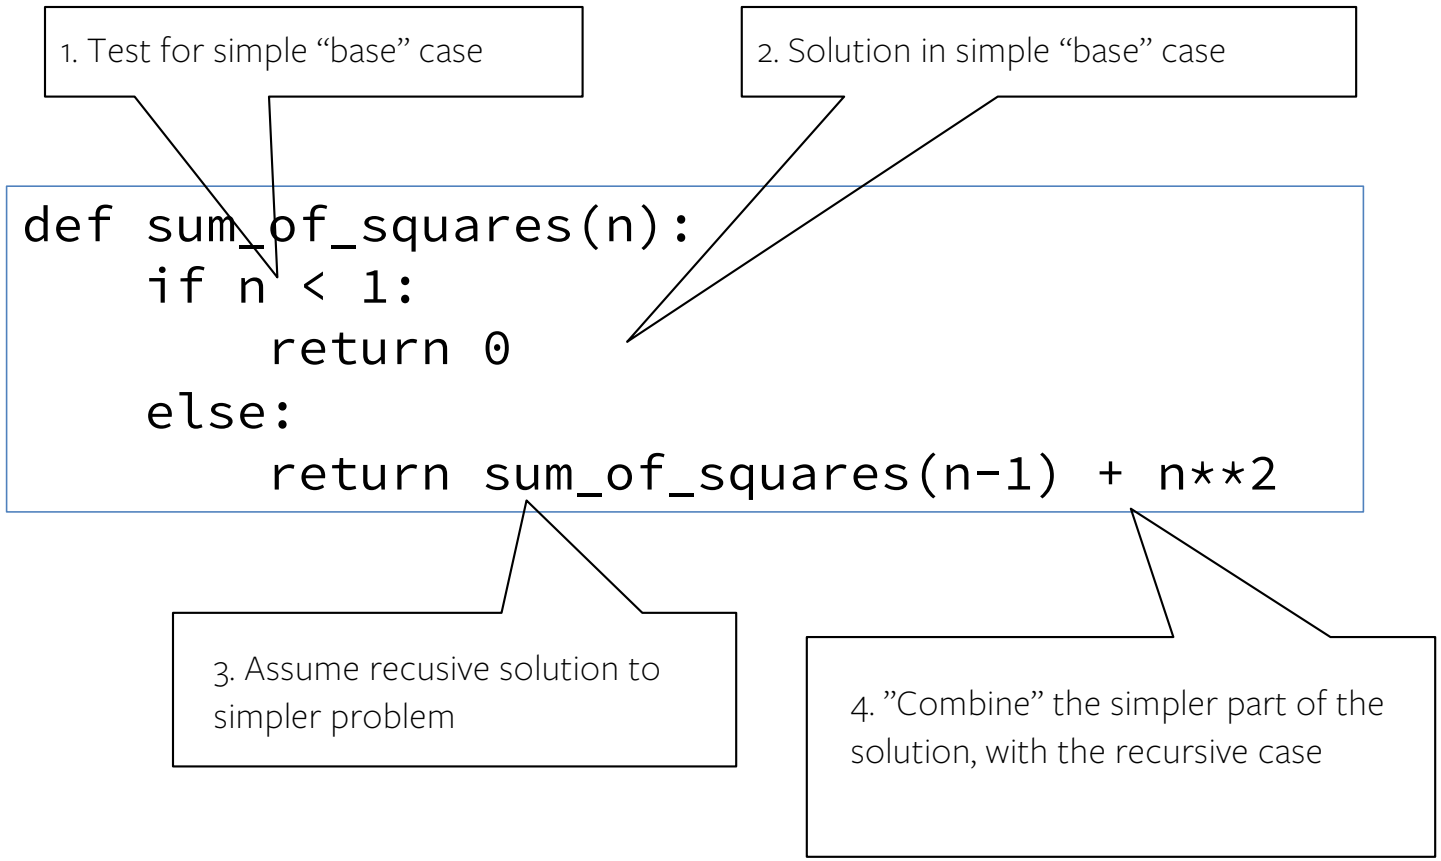

In words

- The sum of no numbers is zero
- The sum of 1^2 through n^2 is the
  - sum of 1^2 through $(n-1)^2$
  - plus n^2

```
def sum_of_squares(n):
    if n < 1:
        return 0
    else:
        return sum_of_squares(n-1) + n**2
```

Why does it work

```
sum_of_squares(3)

# sum_of_squares(3) => sum_of_squares(2) + 3**2
#                   => sum_of_squares(1) + 2**2 + 3**2
#                   => sum_of_squares(0) + 1**2 + 2**2 + 3**2
#                   => 0 + 1**2 + 2**2 + 3**2 = 14
```

Questions

- In what order do we sum the squares ?
- How does this compare to iterative approach ?

```
def sum_of_squares(n):
    accum = 0
    for i in range(1,n+1):
        accum = accum + i*i
    return accum
```

```
def sum_of_squares(n):
    if n < 1:
        return 0
    else:
        return sum_of_squares(n-1) + n**2
```

```
def sum_of_squares(n):
    if n < 1:
        return 0
    else:
        return n**2 + sum_of_squares(n-1)
```

Local variables

- Each call has its own "frame" of local variables
- Let's see the environment diagrams

```
def sum_of_squares(n):
    n_squared = n**2
    if n < 1:
        return 0
    else:
        return n_squared + sum_of_squares(n-1)
```

https://goo.gl/CiFaUJ

How does it work?

- Each recursive call gets its own local variables
  - Just like any other function call
- Computes its result (possibly using additional calls)
  - Just like any other function call
- Returns its result and returns control to its caller
  - Just like any other function call
- The function that is called happens to be itself
  - Called on a simpler problem
  - Eventually stops on the simple base case

Environments Example

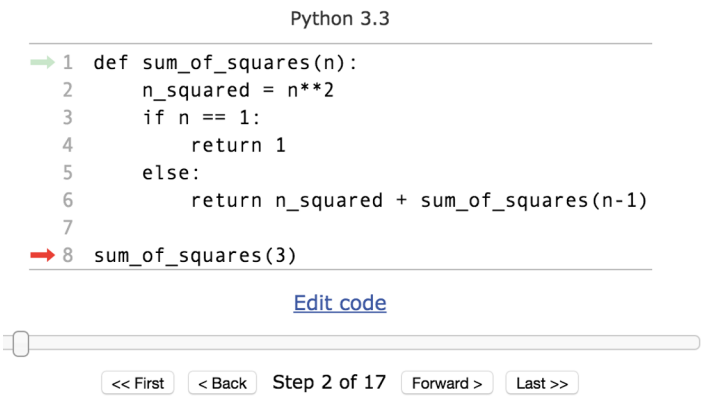

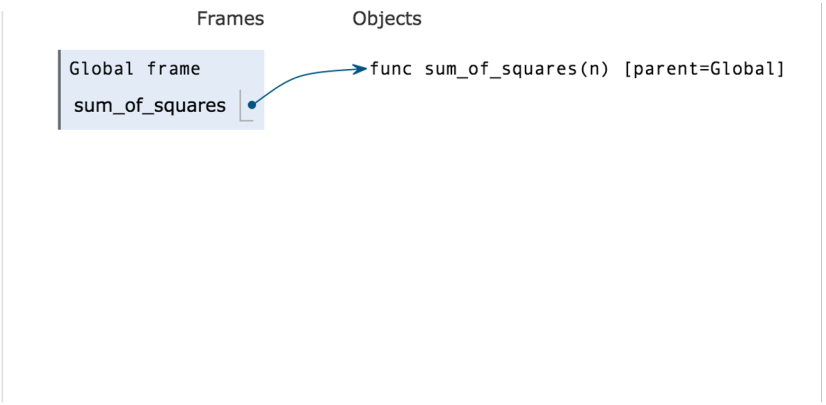

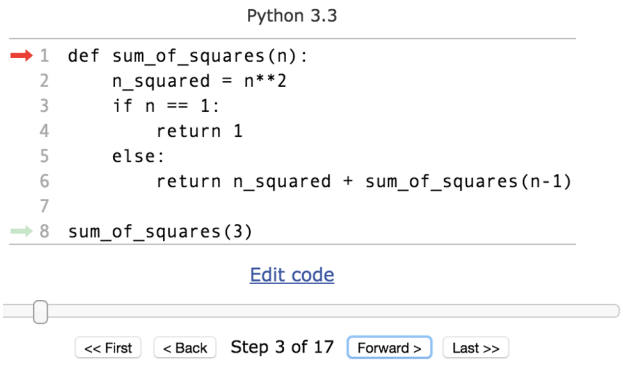

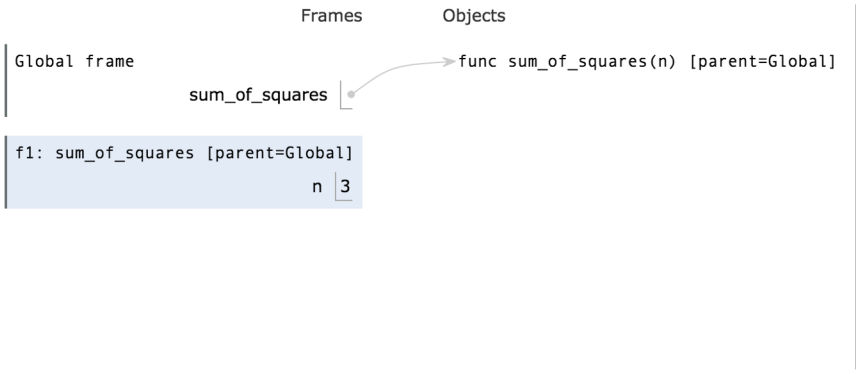

pythontutor.com

Environments Example

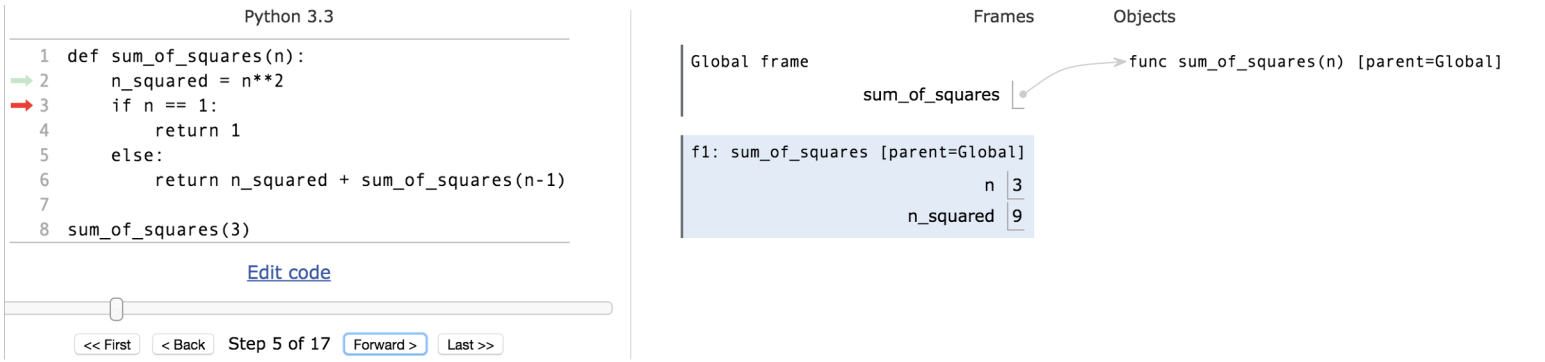

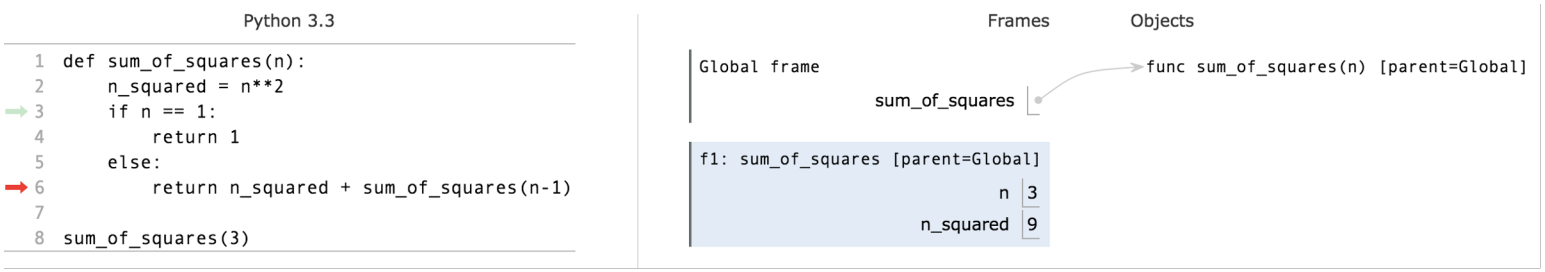

Environments Example

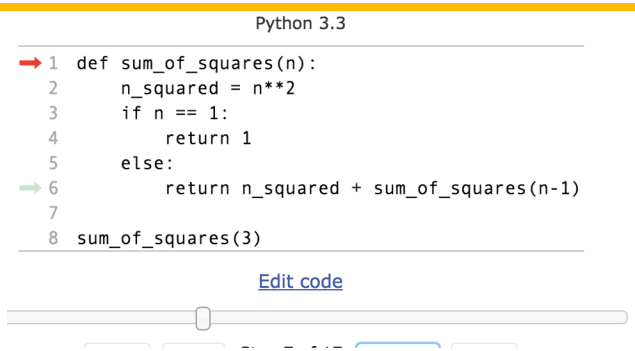

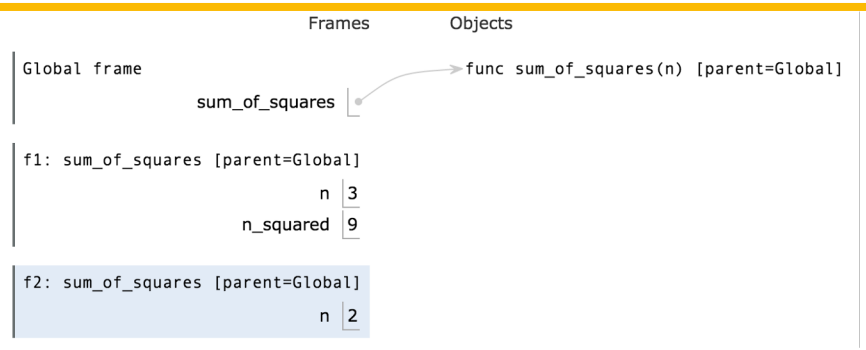

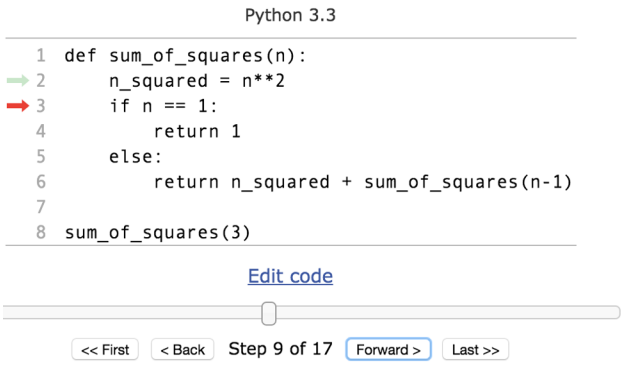

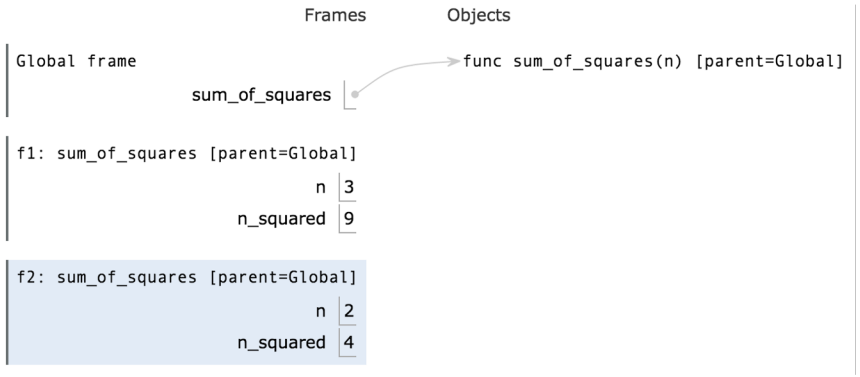

Environments Example

Environments Example

Python 3.3

```
1  def sum_of_squares(n):
2      n_squared = n**2
3      if n == 1:
4          return 1
5      else:
6          return n_squared + sum_of_squares(n-1)
7
8  sum_of_squares(3)
```

Edit code

<< First | < Back | Step 13 of 17 | Forward > | Last >>

that has just executed
t line to execute

Frames Objects

Global frame
sum_of_squares → func sum_of_squares(n) [parent=Global]

f1: sum_of_squares [parent=Global]
n 3
n_squared 9

f2: sum_of_squares [parent=Global]
n 2
n_squared 4

f3: sum_of_squares [parent=Global]
n 1
n_squared 1

Python 3.3

```
1  def sum_of_squares(n):
2      n_squared = n**2
3      if n == 1:
4          return 1
5      else:
6          return n_squared + sum_of_squares(n-1)
7
8  sum_of_squares(3)
```

Edit code

<< First | < Back | Step 14 of 17 | Forward > | Last >>

that has just executed
t line to execute

Frames Objects

Global frame
sum_of_squares → func sum_of_squares(n) [parent=Global]

f1: sum_of_squares [parent=Global]
n 3
n_squared 9

f2: sum_of_squares [parent=Global]
n 2
n_squared 4

f3: sum_of_squares [parent=Global]
n 1
n_squared 1

Environments Example

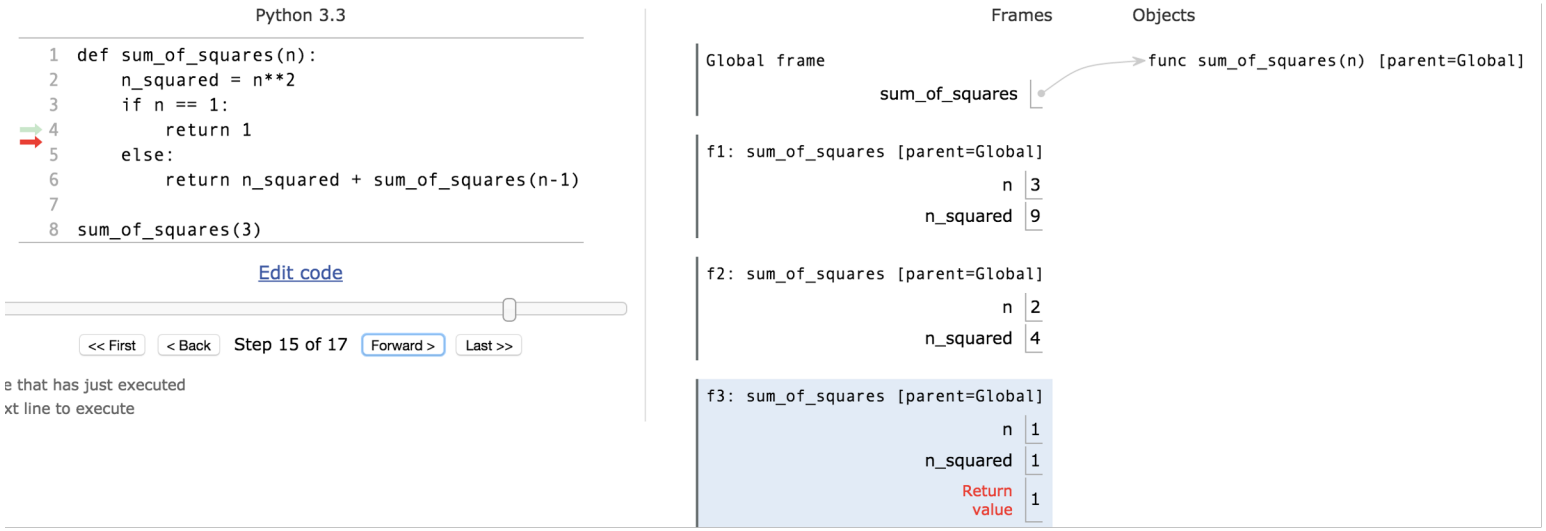

Environments Example

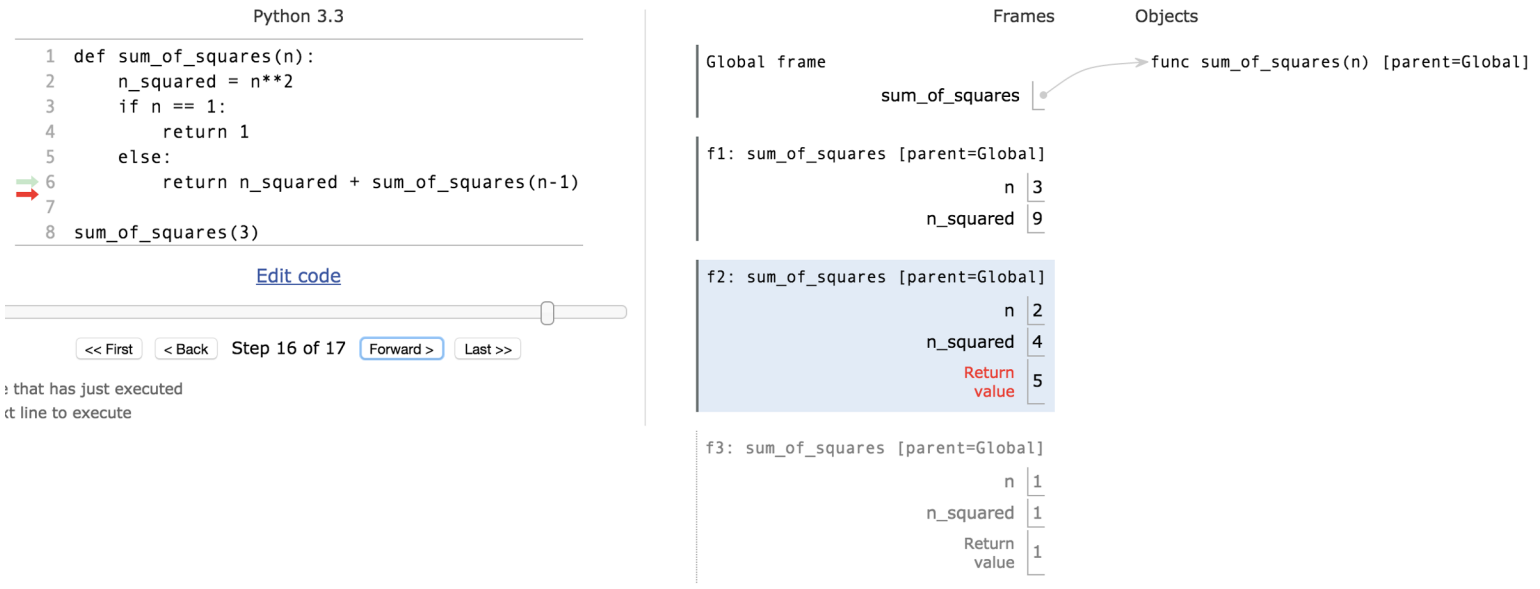

Environments Example

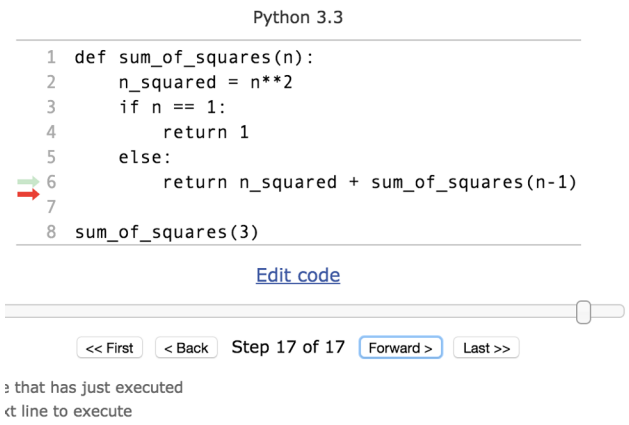

Why Recursion?

- "After Abstraction, Recursion is probably the 2nd biggest idea in this course"
- "It's tremendously useful when the problem is self-similar"
- "It's no more powerful than iteration, but often leads to more concise & better code"
- "It's more 'mathematical'"
- "It embodies the beauty and joy of computing"
- ...

Extra Examples (We'll cover later, too.)

Tree Recursion: Preview for Post-Midterm

- Break the problem into multiple smaller sub-problems, and Solve them recursively

```
def split(x, s):
    return [i for i in s if i <= x], [i for i in s if i > x]

def quicksort(s):
    """Sort a sequence - split it by the first element,
    sort both parts and put them back together."""
    if not s:
        return []
    else:
        pivot = s[0]
        smaller, bigger = split(pivot, s[1:])
        return quicksort(smaller) + [pivot] + quicksort(bigger)

>>> qsort([3,3,1,4,5,4,3,2,1,17])
[1, 1, 2, 3, 3, 3, 4, 4, 5, 17]
```
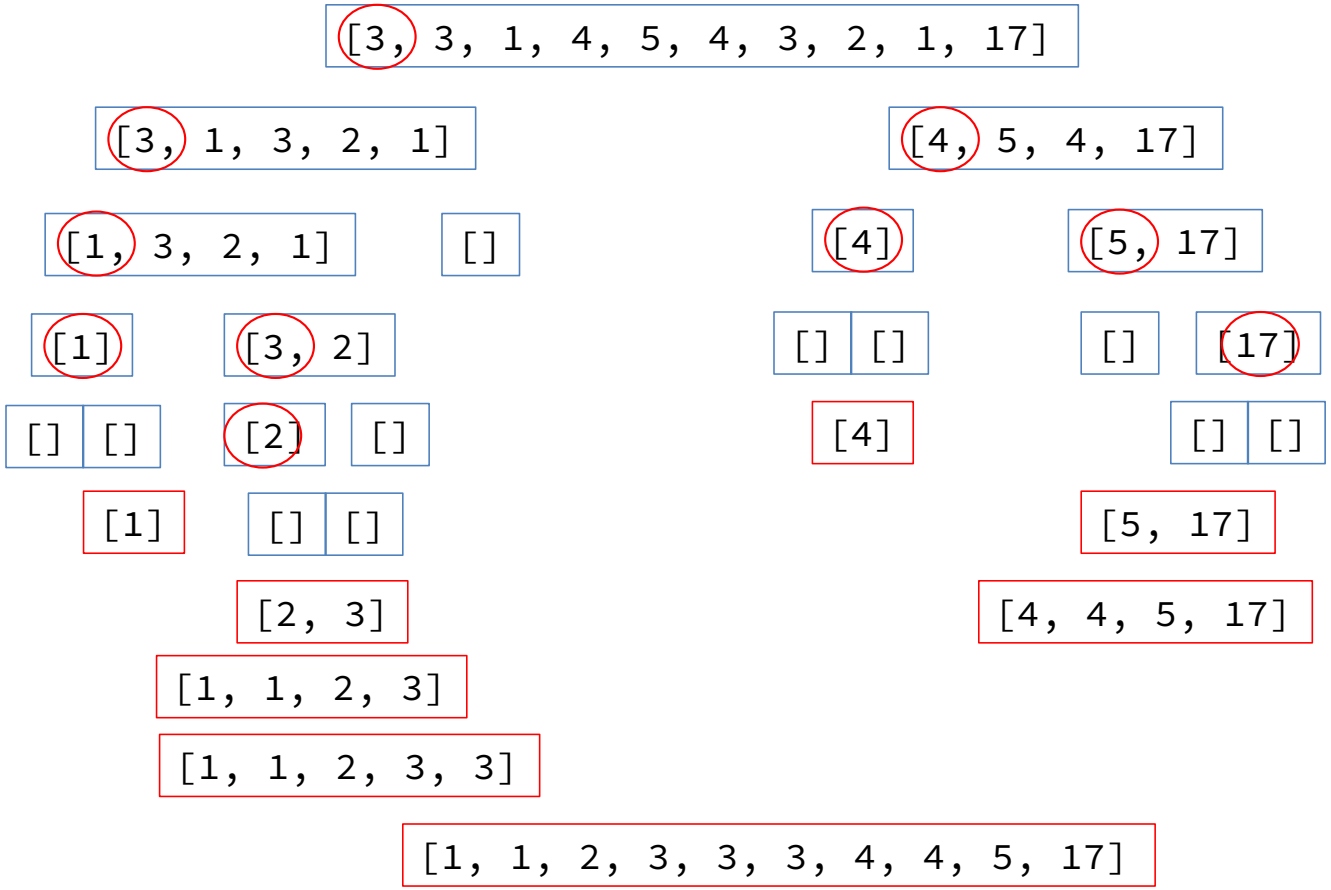
QuickSort Example