



UC Berkeley EECS  
Lecturer  
Michael Ball

# Computational Structures in Data Science



## Recursion II





## Learning Objectives

---

- Write a recursive function
- Understand the base case and a recursive case
- Apply Recursive Functions to lists



## The Recursive Process

---

- Recursive solutions involve two major parts:
  - **Base case(s)**, the problem is simple enough to be solved directly
  - **Recursive case(s)**. A recursive case has three components:
    - **Divide** the problem into one or more simpler or smaller parts
    - **Invoke** the function (recursively) on each part, and
    - **Combine** the solutions of the parts into a solution for the problem.



## Iteration vs Recursion: Sum Numbers

---

For loop:

```
def sum(n):  
    s=0  
    for i in range(0,n+1):  
        s=s+i  
    return s
```



## Iteration vs Recursion: Sum Numbers

---

While loop:

```
def sum(n):  
    s=0  
    i=0  
    while i<n:  
        i=i+1  
        s=s+i  
    return s
```



## Iteration vs Recursion: Sum Numbers

---

Recursion:

```
def sum(n):  
    if n == 0:  
        return 0  
    return n+sum(n-1)
```



## Iteration vs Recursion: Cheating!

---

Sometimes it's best to just use a formula! But that's not always the point. 😊

```
def sum(n):  
    return (n * (n + 1)) / 2
```



## In words

---

- The sum of no numbers is zero
- The sum of  $1^2$  through  $n^2$  is the
  - sum of  $1^2$  through  $(n-1)^2$
  - plus  $n^2$

```
def sum_of_squares(n):  
    if n < 1:  
        return 0  
    else:  
        return sum_of_squares(n-1) + n**2
```



## Recall: Iteration



```
def sum_of_squares(n):  
    accum = 0  
    for i in range(1, n+1):  
        accum = accum + i*i  
    return accum
```

1. Initialize the “base” case of no iterations

2. Starting value

3. Ending value

4. New loop variable value



# Recursion Key concepts – by example

1. Test for simple “base” case

2. Solution in simple “base” case

```
def sum_of_squares(n):  
    if n < 1:  
        return 0  
    else:  
        return sum_of_squares(n-1) + n**2
```

3. Assume recursive solution to simpler problem

4. “Combine” the simpler part of the solution, with the recursive case



## In words

---

- The sum of no numbers is zero
- The sum of  $1^2$  through  $n^2$  is the
  - sum of  $1^2$  through  $(n-1)^2$
  - plus  $n^2$

```
def sum_of_squares(n):  
    if n < 1:  
        return 0  
    else:  
        return sum_of_squares(n-1) + n**2
```

## Why does it work

---



`sum_of_squares(3)`

```
# sum_of_squares(3) => sum_of_squares(2) + 3**2
#                   => sum_of_squares(1) + 2**2 + 3**2
#                   => sum_of_squares(0) + 1**2 + 2**2 + 3**2
#                   => 0 + 1**2 + 2**2 + 3**2 = 14
```



## Questions

- In what order do we sum the squares ?
- How does this compare to iterative approach ?

```
def sum_of_squares(n):  
    accum = 0  
    for i in range(1,n+1):  
        accum = accum + i*i  
    return accum
```

```
def sum_of_squares(n):  
    if n < 1:  
        return 0  
    else:  
        return sum_of_squares(n-1) + n**2
```

```
def sum_of_squares(n):  
    if n < 1:  
        return 0  
    else:  
        return n**2 + sum_of_squares(n-1)
```



## Local variables

---

- Each call has its own “frame” of local variables
- Let’s see the environment diagrams

```
def sum_of_squares(n):  
    n_squared = n**2  
    if n < 1:  
        return 0  
    else:  
        return n_squared + sum_of_squares(n-1)
```

<https://goo.gl/CiFaUJ>



## How does it work?

---

- Each recursive call gets its own local variables
  - Just like any other function call
- Computes its result (possibly using additional calls)
  - Just like any other function call
- Returns its result and returns control to its caller
  - Just like any other function call
- The function that is called happens to be itself
  - Called on a simpler problem
  - Eventually stops on the simple base case




# Environments Example

```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)


<< First < Back Step 2 of 17 Forward > Last >>



```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 3 of 17 Forward > Last >>

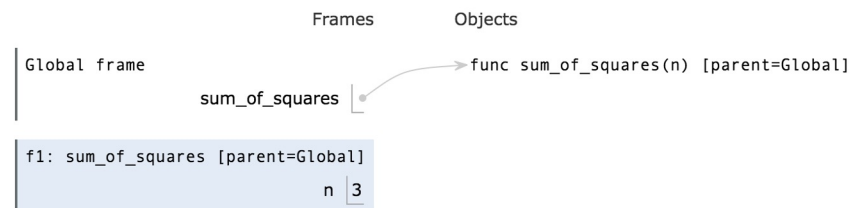

[pythontutor.com](http://pythontutor.com)






# Environments Example


```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 5 of 17 Forward > Last >>

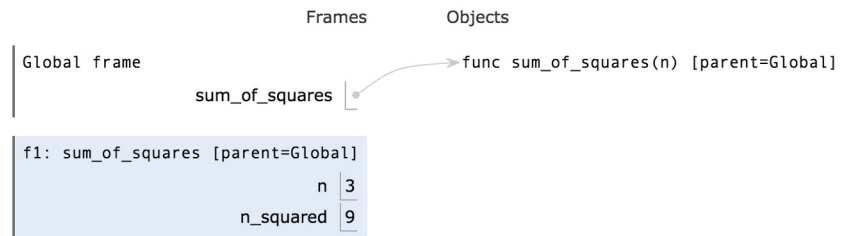

```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

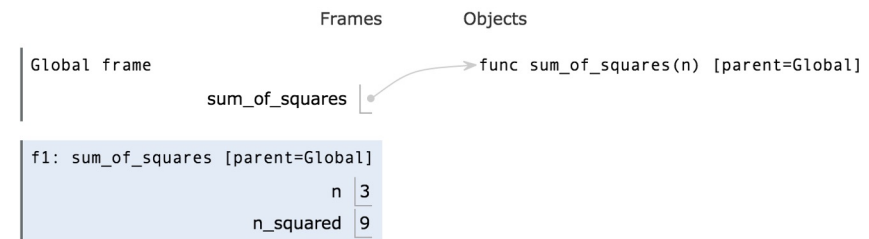



# Environments Example

Python 3.3

```
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```



[Edit code](#)

Python 3.3

```
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 9 of 17 Forward > Last >>

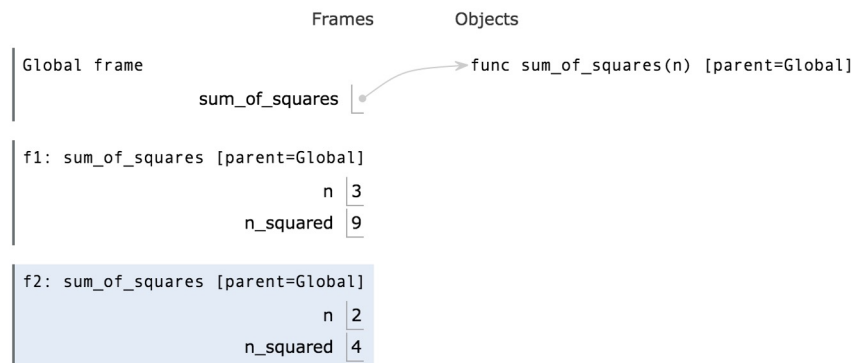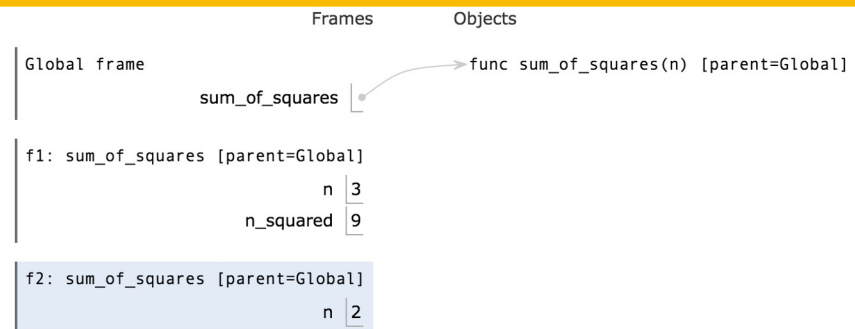



# Environments Example

```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)



<< First < Back Step 10 of 17 Forward > Last >>

```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 11 of 17 Forward > Last >>

that has just executed  
: line to execute

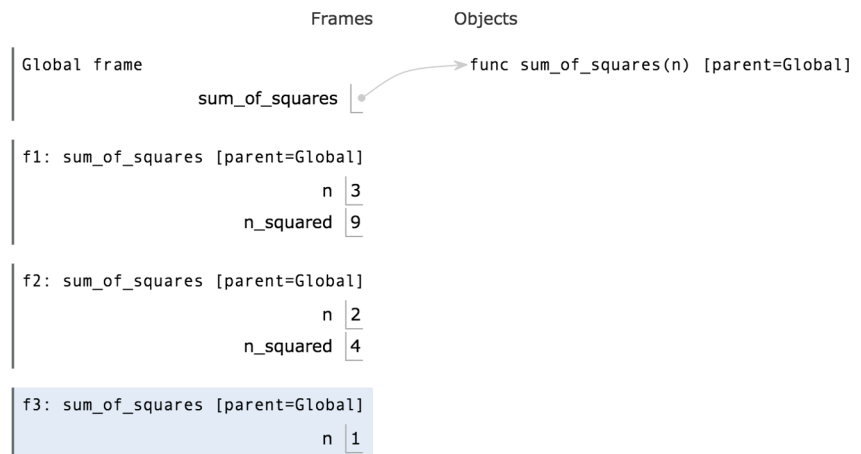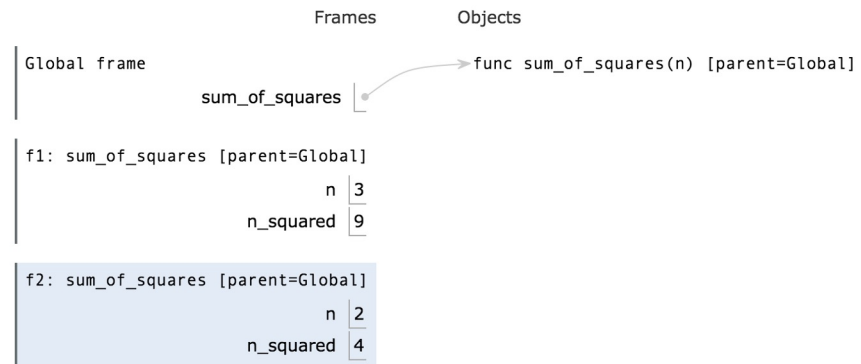



# Environments Example

Python 3.3

```
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 13 of 17 Forward > Last >>

that has just executed  
t line to execute

Python 3.3

```
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 14 of 17 Forward > Last >>

that has just executed  
t line to execute

Frames Objects

Global frame

sum\_of\_squares → func sum\_of\_squares(n) [parent=Global]

f1: sum\_of\_squares [parent=Global]

n 3

n\_squared 9

f2: sum\_of\_squares [parent=Global]

n 2

n\_squared 4

f3: sum\_of\_squares [parent=Global]

n 1

n\_squared 1

Frames Objects

Global frame

sum\_of\_squares → func sum\_of\_squares(n) [parent=Global]

f1: sum\_of\_squares [parent=Global]

n 3

n\_squared 9

f2: sum\_of\_squares [parent=Global]

n 2

n\_squared 4

f3: sum\_of\_squares [parent=Global]

n 1

n\_squared 1



# Environments Example

Python 3.3

```
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 15 of 17 Forward > Last >>

Step that has just executed  
Next line to execute

Frames      Objects

Global frame

sum\_of\_squares → func sum\_of\_squares(n) [parent=Global]

f1: sum\_of\_squares [parent=Global]

n 3

n\_squared 9

f2: sum\_of\_squares [parent=Global]

n 2

n\_squared 4

f3: sum\_of\_squares [parent=Global]

n 1

n\_squared 1

Return value 1



# Environments Example

```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 16 of 17 Forward > Last >>

: that has just executed  
at line to execute





# Environments Example

```
Python 3.3
1 def sum_of_squares(n):
2     n_squared = n**2
3     if n == 1:
4         return 1
5     else:
6         return n_squared + sum_of_squares(n-1)
7
8 sum_of_squares(3)
```

[Edit code](#)

<< First < Back Step 17 of 17 Forward > Last >>

that has just executed  
ct line to execute

Frames

Objects

Global frame

sum\_of\_squares

f1: sum\_of\_squares [parent=Global]

f2: sum\_of\_squares [parent=Global]

f3: sum\_of\_squares [parent=Global]

n	3
n_squared	9
Return value	14

n	2
n_squared	4
Return value	5

n	1
n_squared	1
Return value	1

func sum\_of\_squares(n) [parent=Global]



## Recursion Visualizer

---

- A new tool, similar to PythonTutor which shows just the recursive calls.
- [View Recursion](#)







## Recursion With Lists

- Goal: Find the smallest item in a list, recursively.
- Consider: How do we break this task into smaller parts? What is the "smallest list"?
  - We care about the size of the list itself, not the values.

```
def first(s):  
    """Return the first element in a sequence."""  
    return s[0]  
  
def rest(s):  
    """Return all elements in a sequence after the first"""  
    return s[1:]
```

```
def min_r(s):  
    '''Return minimum value in a sequence.'''  
    if   
    else:  
        
```



## min\_r

---

- Works because we can eventually call `min()` with just two numbers
- Each recursive call shrinks the list by 1 element.
- [Python Tutor Link \(with first and rest functions\)](#)
- [Python Tutor \(no first/rest defined\)](#)
  - This is just shorter and reduces the number of frames, but the same recursive calls
- Sadly recursionvisualizer.com doesn't work on this example ☹️



## Recursion With Strings, and Other Iterables

---

- Consider the lists example. It's basically the same thing. 😊
- Recursive case: Split up the item into a small "first" item, and the "rest"

```
def reverse(s):  
    """  
    >>> reverse('hello')  
    'olleh'  
    >>> reverse(reverse('hello'))  
    'hello'  
    """  
    if not s:  
        return ''  
    return reverse(rest(s)) + first(s)  
    # return reverse(s[1:]) + s[0]
```



## Why Recursion?

---

- “After Abstraction, Recursion is probably the 2<sup>nd</sup> biggest idea in this course”
- “It’s tremendously useful when the problem is self-similar”
- “It’s no more powerful than iteration, but often leads to more concise & better code”
- “It’s more ‘mathematical’”
- “It embodies the beauty and joy of computing”