

Computational Structures in Data Science

Environments, Mutable Data

Week 3, Summer 2024. 7/1 (Mon)



Announcements

- Upcoming due dates
 - HW03, Lab03: Due 7/1 11:59 pm PST (tonight!)
- Project01 (“Maps”) will be released later this week
 - You can work on this + submit with one partner.
 - Or, you can solo it.
- (Holiday) July 4: No lecture/labs/OH!



Credit: [Stephanie McCabe: https://unsplash.com/photos/time-lapse-photography-of-sparkler-and-usa-flag-let-Ajm-ewEC24](https://unsplash.com/photos/time-lapse-photography-of-sparkler-and-usa-flag-let-Ajm-ewEC24)

Lecture overview

- Environment diagrams (review, lambdas)
- Mutable data
 - dict

Computational Structures in Data Science

Environment Diagrams (review,
lambdas)

Berkeley
UNIVERSITY OF CALIFORNIA

Inner (“Nested”) Functions

- Inner functions are *scoped* – they are not visible to the outside world
- But they can be *returned* and thus called later on.
- Like a "regular" function, they have access to all the data (including arguments) of their "parent" or "container" function.

```
def outer_fn(arg_outer):  
    def inner_fn(arg_inner):  
        return arg_outer + arg_inner  
    return inner_fn
```

```
>>> outer_fn(2)(3)  
5
```

Learning Objectives

- Lambda are anonymous functions, which are expressions
 - Don't use **return**, lambdas always return the value of the expression.
 - They are typically short and concise
 - They don't have an "intrinsic" name when using an environment diagram.
 - Their name is the character λ

(review) lambda syntax

Function expression

“anonymous” function creation

```
lambda <arg or arg_tuple> : <expression using args>
```

Expression, not a statement, no return or any other statement

```
add_one = lambda v : v + 1
```

```
def add_one(v):  
    return v + 1
```

Examples

```
>>> def make_adder(i):  
...     return lambda x: x+i  
...  
>>> make_adder(3)  
<function make_adder.<locals>.<lambda> at  
0x10073c510>  
  
>>> make_adder(3)(4)  
7  
  
>>> list(map(make_adder(3), [1, 2, 3, 4]))  
[4, 5, 6, 7]
```


Environment Diagrams (review)

- Organizational tools that help you understand code
- **Terminology:**
 - **Frame:** keeps track of variable-to-value bindings, each function call has a frame
 - **Global Frame:** global for short, the starting frame of all python programs, doesn't correspond to a specific function
 - **Parent Frame:** The frame of where a function is defined (default parent frame is global)
 - **Frame number:** What we use to keep track of frames, f1, f2, f3, etc
 - **Variable vs Value:** $x = 1$. x is the **variable**, 1 is the **value**

Environment Diagrams Rules (review)

1. Always draw the global frame first
2. When evaluating assignments (lines with single equal), always evaluate right side first
3. When you **CALL** a function MAKE A NEW FRAME!
4. When assigning a primitive expression (number, boolean, string) write the value in the box
5. When assigning anything else (lists, functions, etc.), draw an arrow to the value
6. When calling a function, name the frame with the intrinsic name – the name of the function that variable points to
7. The parent frame of a function is the frame in which it was defined in (default parent frame is global)
8. If the value for a variable doesn't exist in the current frame, search in the parent frame

(redo from lec07) Python Tutor Example #3 ([LINK](#))

```
def make_adder(a):  
    return lambda x: x + a  
  
add_2 = make_adder(2)  
add_3 = make_adder(3)  
  
x = add_2(2)  
  
def compose(f, g):  
    def h(x):  
        return f(g(x))  
    return h  
  
add_5 = compose(add_2, add_3)  
z = add_5(x)
```

Main takeaway from this:

- A function's parent frame is the frame in which it was created, NOT where it is called from!
 - Aka "lexical/static" scoping.
- Lambdas behave just like functions, but with "no name" (anonymous fn)
- Variable "shadowing": the `x` in `h()` frame "**shadows**" the `x` in the global frame

Computational Structures in Data Science

Sorting + HOF's

Berkeley
UNIVERSITY OF CALIFORNIA

More Python HOFs

- sorted – sorts a list of data
- min
- max

All three take in an optional argument called **key** which allows us to control how the function performs its action. They are more similar to filter than map.

```
max([1,2,3,4,5], key = lambda x: -x)
```

key is the name of the argument and a lambda is its value.

```
>>> fruits = ["pear", "grape", "KIWI", "APPLE", "melon",  
"ORANGE", "BANANA"]  
>>> sorted(fruits key=lambda x: x.islower())  
['KIWI', 'APPLE', 'ORANGE', 'BANANA', 'pear', 'grape',  
'melon']
```

Sorting Data

- It is often useful to sort data.
- What property should we sort on?
 - Numbers: We can clearly sort.
- What about the length of a word?
- Alphabetically?
- What about sorting a complex data set, but 1 attribute?
 - Image I have a list of courses: I could sort by course name, number of units, start time, etc.
- Python provides 1 function which allows us to provide a *lambda* to control its behavior

Sorting with Lambdas

```
>>> sorted([1,2,3,4,5], key = lambda x: x)
[1, 2, 3, 4, 5]
>>> sorted([1,2,3,4,5], key = lambda x: -x)
[5, 4, 3, 2, 1]
# Sorting a list of tuples by various criterion
>>> my_tuples = [(2, "hi"), (1, "how"), (5, "goes"), (7, "it")]
# Sort by first entry (int)
>>> sorted(my_tuples, key = lambda x: x[0])
[(1, 'how'), (2, 'hi'), (5, 'goes'), (7, 'it')]
# Sort by second entry (str)
>>> sorted(my_tuples, key = lambda x: x[1])
[(5, 'goes'), (2, 'hi'), (1, 'how'), (7, 'it')]
# Sort by length of second entry
>>> sorted(my_tuples, key = lambda x: len(x[1]))
[(2, 'hi'), (7, 'it'), (1, 'how'), (5, 'goes')]
```


Computational Structures in Data Science

Dictionaries

Berkeley
UNIVERSITY OF CALIFORNIA

Learning Objectives

- Dictionaries are a new type in Python
- **Lists** let us index a value by a number, or position.
- **Dictionaries** let us index data by other kinds of data.
 - KEY -> VALUE mapping. Aka “**lookup table**”
 - Extremely useful data type used in many languages/systems

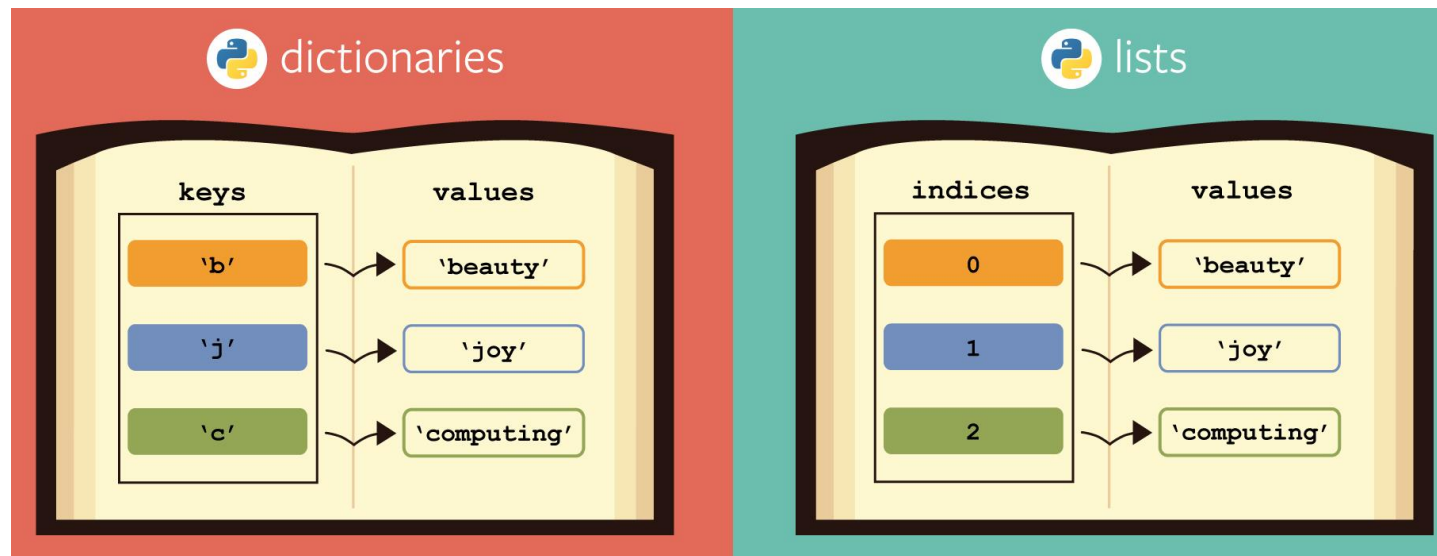

Dictionaries: syntax

```
# Constructors
# dict( <list of 2-tuples> )
my_dict = dict((('key1', 'value1'), ('key2', 'value2')))
# dict( <key>=<val>, ...) # like kwargs
dict(key1='value1', key2='value2')
# { <key exp>:<val exp>, ... }
{"key1": "value1", "key2": "value2"}

# { <key>:<val> for <iteration expression> }
{key: value for (key, value) in [("key1", "value"), ("key2", "value2")]}
# Example:
>>> {x: y for x, y in zip(["a", "b"], [1, 2])}
{'a': 1, 'b': 2}
```

Dictionaries: common operations

```
my_dict = {"key1": "value1", "key2": "value2"}
```

```
# selector (key present / missing)
```

```
>>> my_dict['key1']
```

```
'value1'
```

```
>>> my_dict['meow']
```

```
Traceback (most recent call last):
```

```
  File "<stdin>", line 1, in <module>
```

```
KeyError: 'meow'
```

```
>>> my_dict.get('meow') # returns None
```

```
>> my_dict.get('meow', 'fallback')
```

```
'fallback'
```

```
# operators: in, not in, min/max
```

```
>>> 'key1' in my_dict
```

```
True
```

```
>>> 'not_present' in my_dict
```

```
False
```

```
# writing to a dict
```

```
my_dict['key3'] = 42
```

```
my_dict['key3']
```

```
42
```

Demo

```
person = { 'name': 'Michael' }  
person.get('name')  
person['email'] = 'ball@berkeley.edu'  
person.keys()  
'phone' in person  
  
text = 'One upon a time'  
{ word : len(word) for word in text.split() }
```

Computational Structures in Data Science

Mutability

Berkeley
UNIVERSITY OF CALIFORNIA

Learning Objectives

- Distinguish between when a function mutates data, or returns a new object
 - Many Python "default" functions return new objects
- Understand modifying objects **in place**
- Python provides "is" and "==" for checking if items are the same, in different ways

Why does Mutability Matter?

- Recall: “mutable/mutation” means “to modify / modifiable”
 - “immutable” means “unmodifiable”
- Mutable data is a reality — lists, dictionaries, objects (coming soon)
- It's a challenging aspect of programming
- There are common patterns, which you will *slowly* become familiar with and internalize.
- Use your environment diagrams!

Objects in Python (preview of Object-Oriented Programming)

- An **object** is a bundle of data and behavior.
- A type of object is called a **class**.
- Every value in Python is an object.
 - string, list, int, tuple, et
- All objects have attributes
- Objects often have associated methods
 - `lst.append()`, `lst.extend()`, etc
- **Objects have a value (or values)**
 - Mutable: We can change the object after it has been created
 - Immutable: We cannot change the object.
- Objects have an *identity*, a reference to that object.

Immutable Object: string

- `course = 'CS88'`
- What kind of object is it?
 - `type(course)`
- What data is inside it?
 - `course[0]`
 - `course[2:]`
- What methods can we call?
 - `course.upper()`
 - `course.lower()`
- None of these methods modify our original string.

Mutable Objects: lists and dictionaries

- **Immutable** – the value of the object cannot be changed
 - integers, floats, booleans
 - strings, tuples
- **Mutable** – the value of the object can change over time
 - Lists
 - Dictionaries

```
>>> alist = [1,2,3,4]
>>> alist
[1, 2, 3, 4]
>>> alist[2]
3
>>> alist[2] = 'elephant'
>>> alist
[1, 2, 'elephant', 4]
```

```
>>> adict = {'a':1, 'b':2}
>>> adict
{'b': 2, 'a': 1}
>>> adict['b']
2
>>> adict['b'] = 42
>>> adict['c'] = 'elephant'
>>> adict
{'b': 42, 'c': 'elephant', 'a':
1}
```

Dictionaries (syntax/operations review)

Constructors:

```
dict( hi=32, lo=17)
dict([('hi',212),('lo',32),(17,3)])
{'x':1, 'y':2, 3:4}
{wd : len(wd) for wd in "The quick brown fox".split()}
```

Selectors:

```
water['lo']
<dict>.keys(), .items(), .values()
<dict>.get(key [, default] )
```

Operations:

```
in, not in, len, min, max
'name' in course
```

Mutators

```
course['number'] = 'C88C'
course.pop('room')
del course['room']
```



These mutator operations modify the dict object!

Immutability vs Mutability

- An immutable value is unchanging once created.
- Immutable types (that we've covered): int, float, string, tuple

```
a_string = "Hi y'all"  
a_string[1] = "I" # ERROR  
a_string += ", how you doing?"  
an_int = 20  
an_int += 2
```


- A mutable value can change in value throughout the course of computation. All names that refer to the same object are affected by a mutation.
- Mutable types (that we've covered): list, dict

```
grades = [90, 70, 85]  
grades_copy = grades # Not actually a copy!  
grades[1] = 100 # grades_copy changes too!  
words = {"agua": "water"}  
words["pavo"] = "turkey"
```

Mutation in Environments

- A variable assigned a compound value (object) is a reference to that object.
- Mutable objects can be changed but the variable(s) still refer to it
 - x is still the same object, but its values have changed.

```
x = [1, 2, 3]
y = 6
x[1] = y
x[1]
```

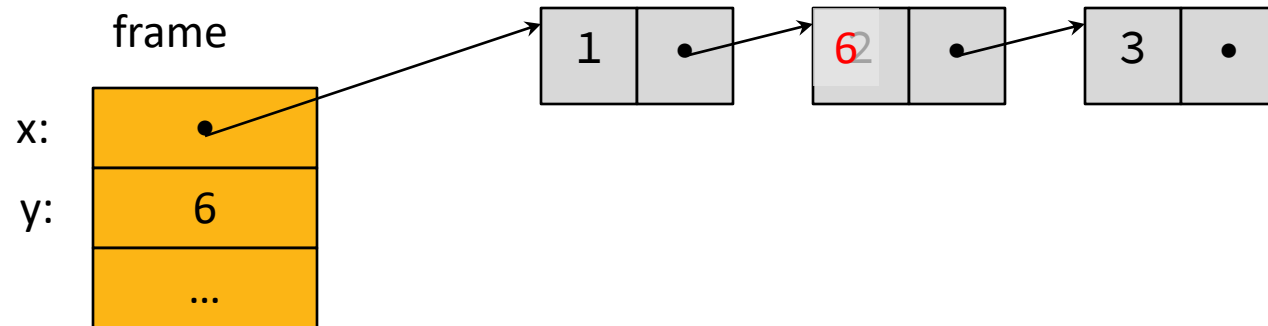

Lecture overview. Any questions?

- Environment diagrams (review, lambdas)
- Mutable data
 - dict